

# HYDROGEN APPLICATIONS

Innovations and the need for safe and efficient processes are constantly driving development with increasingly challenging application parameters. For static and semi-dynamic H<sub>2</sub>-applications, we supply O-rings and custom seals made of specially developed EPDM and low-temperature FKM materials. These have excellent properties in terms of material integrity and permeability.

**APPLICATIONS:** our H<sub>2</sub>G-seals can be found in electrolysers, compressors, valves, connectors, sensors and pumps along the H<sub>2</sub> supply chain. All our selected materials are RGD compliant\*\*\*.

Material	VB090LE1	EB070ST0	EB090ST1
ASTM Code	FKM	EPDM	EPDM
Colour	●	●	●
Hardness [Sh. A]	90	70	90
Temp. [C°]**	-50/200	-45/150	-50/150
Compr. Set [%]	21	18	16
Hours at Temp.	72h/175 °C	24h/90 °C	24h/90 °C
H <sub>2</sub> -Perm.Coeff.*	3E+02	18E+02	12E+02


\* Bei 23 °C [Ncm<sup>3</sup> · mm · Tag<sup>-1</sup> · bar<sup>-1</sup> · m<sup>-2</sup>]

\*\* Constant service

\*\*\* Except EB070ST0 (low pressure H<sub>2</sub>-applications up to 20 bar)

**DYNAMIC SEALS AND BACK-UP RINGS:** H<sub>2</sub> applications often require the use of high-performance plastics. Depending on the application and temperature range, we offer different seal geometries and back-up rings made of UHMW-PE, PEEK and various PTFE compounds.


Material	UHMW-PEW	PEEKVIRY	PTFEVIRW	PTFE-CGB
ASTM Code	UHMW-PE	PEEK	PTFE virginal	PTFE CG
Colour	● ●	●	●	●
Temp. [C°]**	-150 / 90	-60 / 240	-180 / 260	-100 / 250
Tensile strength [MPA]	19	116	22	15
Coefficient of friction	0,15	0,1 - 0,3	0,06	0,12 - 0,14
Rapid Gas Decompression	Tested	●	n.a.	Tested

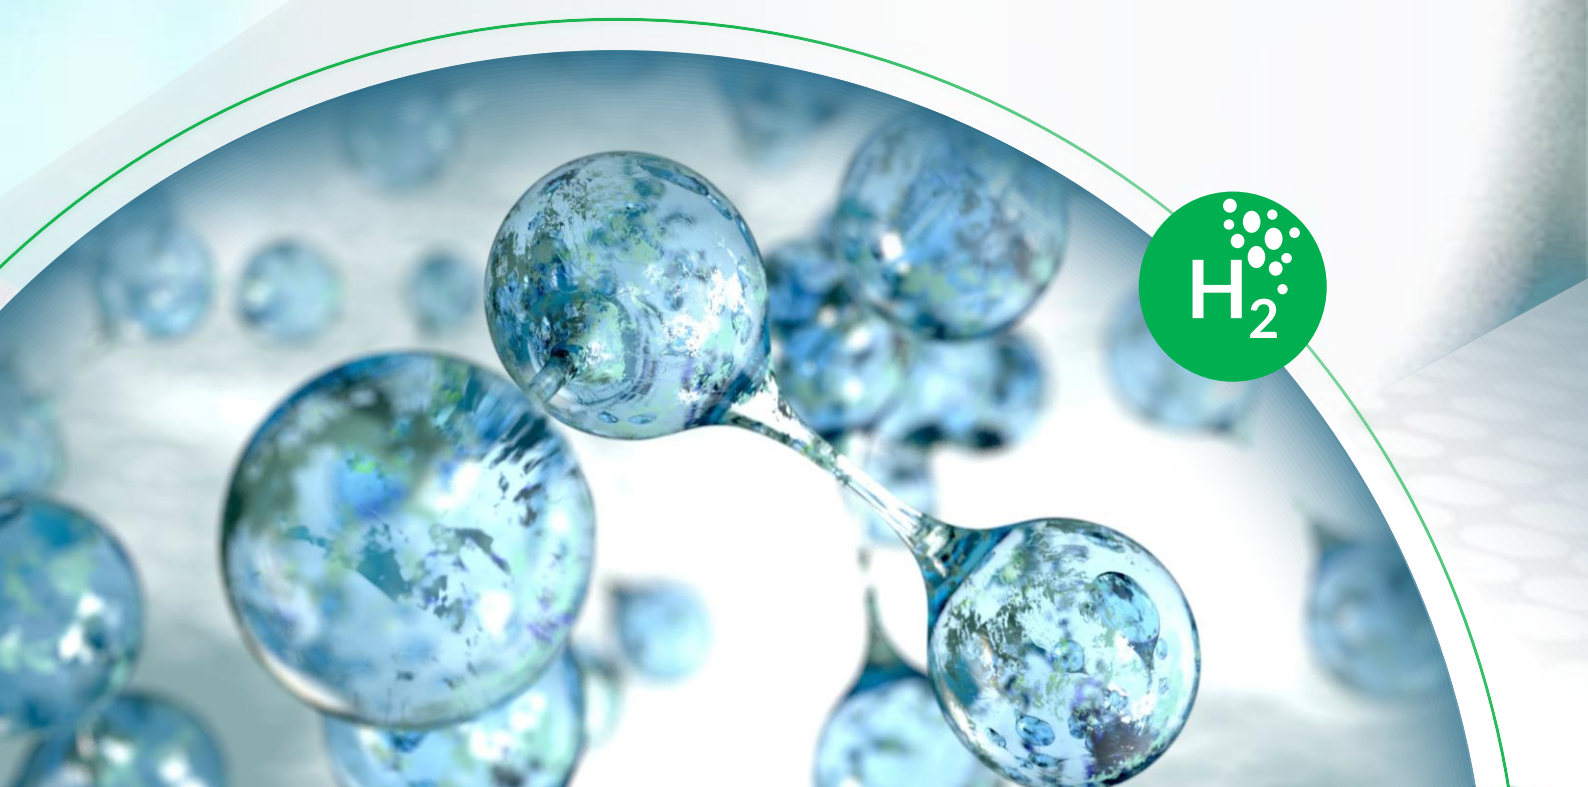



# HYDROGEN: ENERGY IN TRANSITION

## High-performance sealing systems in new cycles

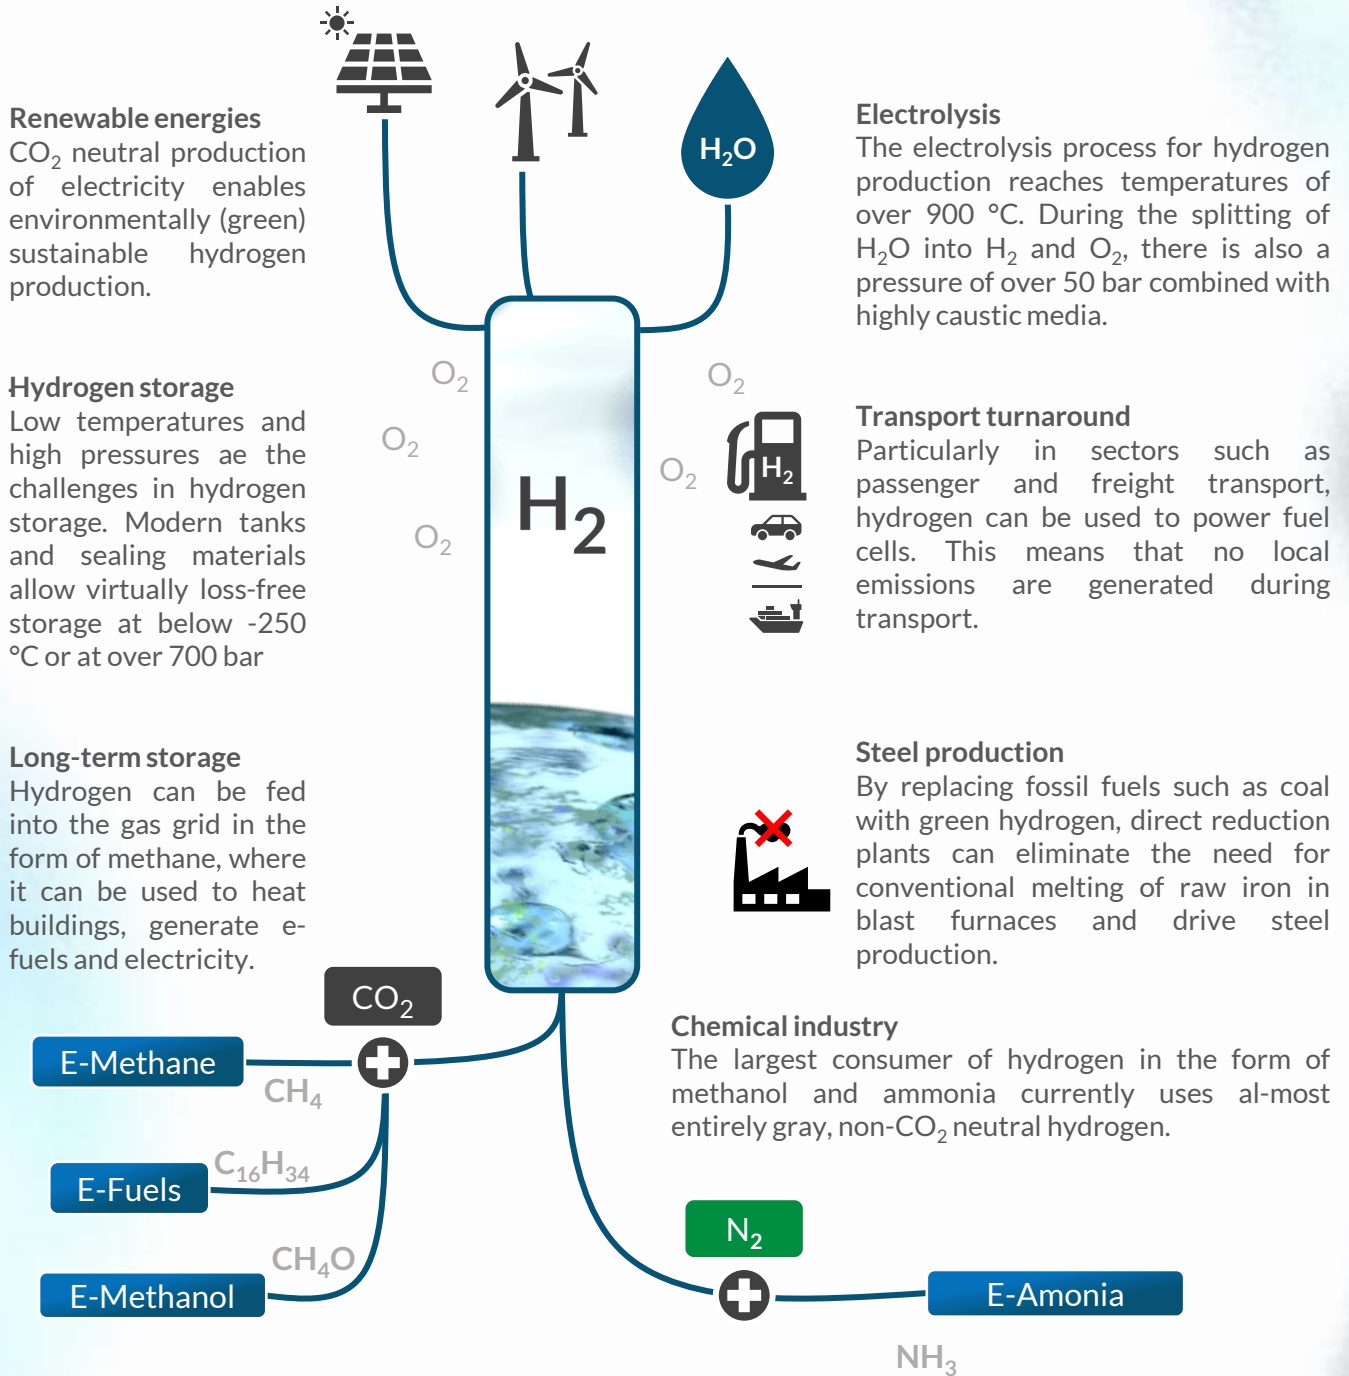

## H<sub>2</sub>G - GITIS HYDROGEN SERIES

Sealing products from our H<sub>2</sub>G series are already in use in applications such as valves, connectors and FCEV fueling.

© Copyright: The publisher cannot accept any liability for the accuracy of the publication despite careful examination. This brochure, all tables, texts and illustrations contained in it, are protected by copyright. Any use outside the narrow limits of copyright is inadmissible and punishable without the consent of the publisher.  
Disclaimer: In general, the enclosed information, recommendations or advices are given in a good faith. The publisher gives no warranty that the same results can be obtained in other's laboratories using different condition of preparation and evaluation of the samples.

GITIS SRL - via Rocca, 4 - 24067 Sarnico - BG - ITALY / Sede operativa: GITIS SRL - via Colombara del Bosco, 26 - 25031 Capriolo - BS - ITALY / www.gitis.it / C.F. n. 00844470161 C.F. e P. Iva n. 00844470161  
Averis GmbH - Hofener Straße 64 - 70736 Fellbach - GERMANY / Tel. +49 711 88872837 www.averis-lab.com / HRB Stuttgart 757053 - USt-ID: DE 306390337

SEALING YOUR SUCCESS

